

SG25/30/33CX-P2

Multi-MPPT String Inverter for 1000 Vdc System



HIGH YIELD

- DC 15A current input, compatible with over 500W+ PV module
- Dynamic shading optimization mode
- Built-in PID recovery function



SMART O&M

- Key component diagnosis and protection
- Smart IV Curve Diagnosis
- Grid fault record function, easy for remote O&M



LOWER INVESTMENT


- Easy to handle thanks to 34% weight reduced
- Plug and Play with Buckle Design




PROVEN SAFETY

- IP66 protection and C5 Anti-corrosion
- DC Type I+II SPD, AC Type II SPD
- Support AFCI 2.0 function

CIRCUIT DIAGRAM

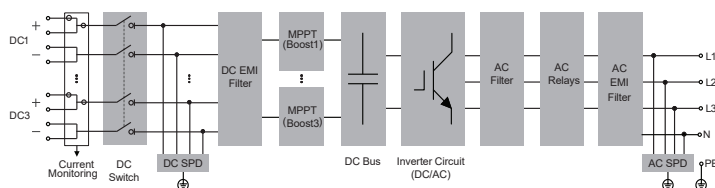

EFFICIENCY CURVE (SG33CX-P2)

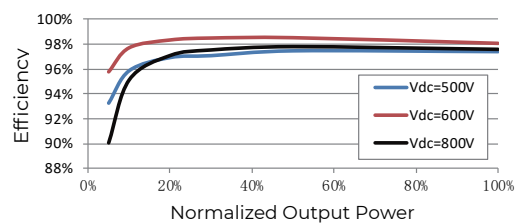

Type designation	SG25CX-P2	SG30CX-P2	SG33CX-P2
Input (DC)			
Recommended max. PV input power	35 kWp	42 kWp	46.2 kWp
Max. PV input voltage*	1100 V		
Min. PV input voltage / Startup input voltage	160 V / 200 V		
Rated PV input voltage	600 V		
MPPT voltage range**	160 V - 1000 V		
No. of independent MPP inputs	3		
No. of PV strings per MPPT	2		
Max. PV input current	90 A (30 A * 3)		
Max. DC short-circuit current	120 A (40 A * 3)		
Max. current for DC connector	30 A *****		
Output (AC)			
Rated AC output power	25 kW	30 kW	33 kW
Max. AC output apparent power	27.5 kVA	33 kVA ***	36.3 kVA
Max. AC output current	41.8 A	50.2 A	55.2 A
Rated AC output current(at 230V)	36.2 A	43.5 A	47.8 A
Rated AC voltage	3 / N / PE, 220 V / 380 V, 230 V / 400 V		
AC voltage range	312 V - 480 V		
Rated grid frequency	50 Hz / 60 Hz		
Grid frequency range	45 Hz – 55 Hz / 55 Hz – 65 Hz		
Harmonic (THD)	< 3 % (at rated power)		
Power factor at rated power / Adjustable power factor	> 0.99 / 0.8 leading – 0.8 lagging		
Feed-in phases / AC connection	3 / 3-N-PE		
Efficiency			
Max. efficiency / European efficiency	98.4 % / 98.2 %	98.5 % / 98.3 %	98.5% / 98.3%
Protection			
Grid monitoring	Yes		
DC reverse polarity protection	Yes		
AC short-circuit protection	Yes		
Leakage current protection	Yes		
Surge protection	DC Type I+II / AC Type II		
Ground fault monitoring	Yes		
DC switch	Yes		
PV string current monitoring	Yes		
Arc fault circuit interrupter (AFCI)	Yes		
PID recovery function	Yes		
Optimizer compatibility ****	Optional		
General data			
Dimensions (W * H * D)	645 mm * 575 mm * 245 mm		
Weight	38 kg		
Mounting method	Wall-mounting bracket		
Topology	Transformerless		
Degree of protection	IP66		
Night power consumption	< 7 W		
Corrosion	C5		
Operating ambient temperature range	-30 °C to 60 °C		
Allowable relative humidity range (non-condensing)	0 % - 100 %		
Cooling method	Smart forced air cooling		
Max. operating altitude	4000 m		
Display	LED, Bluetooth+APP		
Communication	RS485 / Optional: WLAN, Ethernet		
DC connection type	Evo2 (Max. 6 mm²)		
AC connection type	OT terminal (16 mm² - 35 mm²)		
AC cable specification	Outside diameter 18 mm - 38 mm		
Grid compliance	IEC 62109-1/2, IEC 61727, IEC 62116, VDE-AR-N 4105:2018, IEC 61000-6-3, IEC 61683 IEC 60068 EN 50530, IEC 62910, IEC 61920, IEC61000-3-11/12, IEC 60529, EN 50549-1/2/10, EN/IEC 61000-6-1/2/3/4, EN 300 328, EN301489, EN 62311, CEI 0-21 2019, CEI 0-16 2019, VDE 0126-1-1/A1 VFR 2019, UTE C15-712-1:2013, UNE 217002, G99, IEC 63027, TOR typeA+B and OVE R25, DEWA, VDE 4110, IRR-DCC-MV, NC RfG, PSE 2018, NRS-097-2-1, UNE 217001, ITC-BT-40, NTS V2.1, PEA, MEA, RD 647		
Grid support	Q at night function, LVRT, HVRT,active & reactive power control and power ramp rate control		

* Input voltage exceeding the MPPT operating voltage range triggers inverter protection ** Please refer to the user manual for the full load MPPT voltage range

*** 30kVA for Germany, Belgium, Austria, Ukraine and Denmark, 33kVA for others **** Only valid for SG25-50CX-P2 V21. For SP600S optimizer, please consult Sungrow before placing an order

***** Only valid for SG25-50CX-P2 V21 or for SG25CX-P2 V12 with SN higher than A23A0804256, SG30CX-P2 V12 with SN higher than A23C2803919, SG33CX-P2 V12 with SN higher than A2412600401. Previous versions of V12 may be equipped with 20A.